

Platina Esquinera

La platina esquinera es un soporte metálico diseñado para reforzar uniones en ángulo de 90°, garantizando estabilidad y firmeza en estructuras de madera o metal.

Su diseño perforado y su alta resistencia la convierten en una solución práctica y versátil para ensamblajes, reparaciones y montaje de muebles, repisas y proyectos de bricolaje.

Dimensiones de la pieza:

A	B	C	D
77,60	22,00	16,90	Ø5,00

Material:

- Lamina Cold Rolled calibre 14 (1,9mm)

Recubrimiento:



Zincado



Negro Mate

Pruebas cámara salina (horas):

- Zincado: 120 horas
- Pintura electrostática: 400 horas.

Usos:

- Para unir dos o más componentes a 90 grados como sillas, camas y cajonería en general, anclaje de elementos decorativos o utilitarios a la pared.

Características:


- Borde doblado que mejora la rigidez y el agarre en la superficie donde se instala brindando estabilidad y resistencia.
- Facilita el ensamble entre los componentes.
- Perforaciones avellanadas que facilita el ajuste de la cabeza del tornillo.
- Incluye tornillos Drywal 6x3/4".

Empaque:

- Primario: Bolsa y solapa x 4 unidades.
- Secundario: Bolsa x 10 bolsas con solapa (40 unidades).
- Terciario: Caja cartón corrugado x 6 bolsas de 40 unidades (240 unidades).

Trazabilidad:

- Empacador, fecha y sticker.

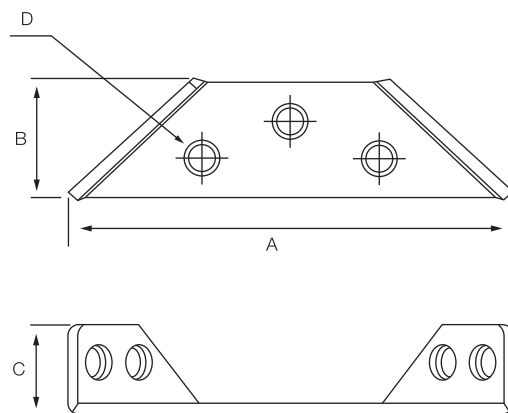

Reinforcement **Corner Plate**

The corner bracket is a metal support designed to reinforce 90° angle joints, ensuring stability and strength in wood or metal structures.

Its perforated design and high resistance make it a practical and versatile solution for assembling, repairing, and mounting furniture, shelves, and DIY projects.

Dimensions of the part(mm)

A	B	C	D
77,60	22,00	16,90	Ø5,00

Material:

- Cold Rolled steel gauge 14 (1,9mm)

Covering:



Zinc Plated



Matte Black

Salt chamber tests (hours):

- Zinc plating: 120 hours
- Electrostatic painting: 400 hours.

Uses:

- To join two or more components at 90 degrees, such as chairs, beds, and general drawers; anchoring decorative or utilitarian elements to the wall.

Characteristics:

- Folded edge that improves rigidity and grip on the surface where it is installed, providing stability and strength.
- Facilitates assembly between components.
- Countersunk holes that facilitate screw head adjustment.
- Includes 6 x 3/4" drywall screws.

Packaging:

- Primary packaging: Bag with flap x 4 units.
- Secondary packaging: Bag x 10 bags with flap (40 units).
- Tertiary packaging: Corrugated cardboard box x 6 bags of 40 units each (240 units).

Traceability:

- Packer, date and sticker.

